


## SENSOR DE PROXIMIDAD


### Dimensiones del modelo inmune al campo magnético del equipo de soldadura

Unidad:mm


●PRA12-2D □ ●PRAT12-2D □

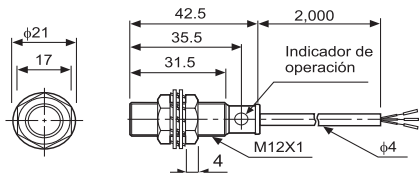


●PRA12-2A □




●PRA18-5D □ ●PRAT18-5D □

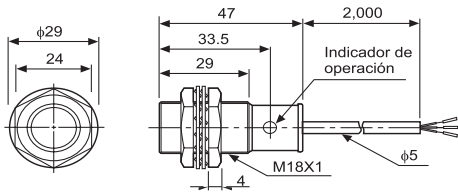


●PRA18-5A □



●PRA30-10D □ ●PRAT30-10D □

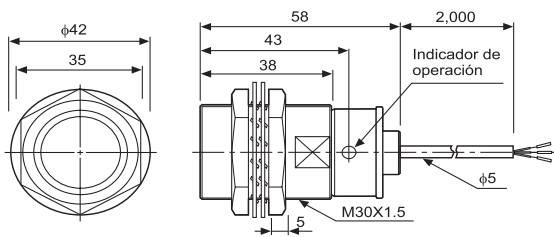

●PRA30-10A □




### Dimensiones del modelo con conector

Unidad:mm


●M12

<Enrasable>

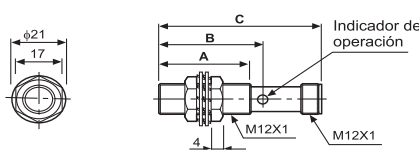

Modelo	A	B	C
PRCMT12-2D □	31.5	35.5	55.8
PRCM12-2D □	31.5	35.5	55.8
PRCM12-2A □	48.5	52.5	72.8


<No Enrasable>

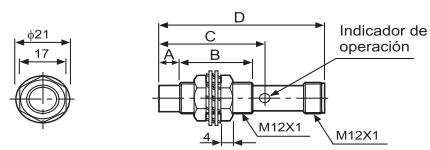

Modelo	A	B	C	D
PRCMT12-4D □	7	24.5	35.5	55.8
PRCM12-4D □	7	24.5	35.5	55.8
PRCM12-4A □	7	41.5	52.5	72.8


●M18

<Enrasable>

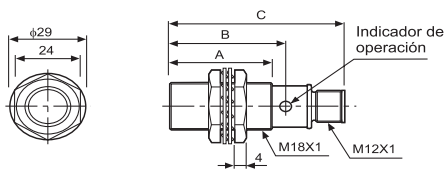

Modelo	A	B	C
PRCMT18-5D □	29.0	33.5	53.8
PRCM18-5D □	29.0	33.5	53.8
PRCM18-5A □	35.3	39.5	60.1
PRCHL18-5D □	62.0	66.5	86.8
PRCML18-5A □	62.0	66.5	86.8


<No Enrasable>

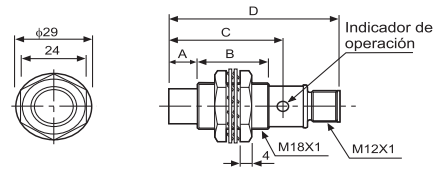

Modelo	A	B	C	D
PRCMT18-8D □	10	19.0	33.5	53.8
PRCM18-8D □	10	19.0	33.5	53.8
PRCM18-8A □	10	25.3	39.5	60.1
PRCML18-8D □	10	52.0	66.5	86.8
PRCML18-8A □	10	52.0	66.5	86.8


●M30

<Enrasable>

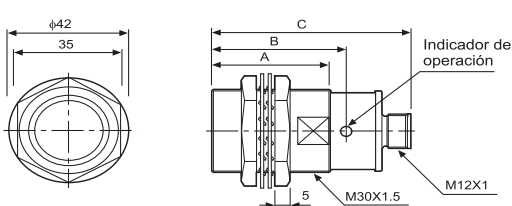

Modelo	A	B	C
PRCMT30-10D □	38.0	43.0	63.8
PRCM30-10D □	38.0	43.0	63.8
PRCM30-10A □	38.0	43.0	63.8
PRCML30-10D □	60.0	65.0	85.8
PRCML30-10A □	60.0	65.0	85.8

<No Enrasable>

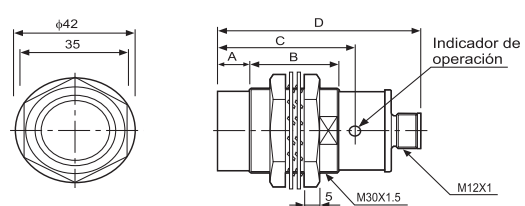

Modelo	A	B	C	D
PRCMT30-15D □	10	28.0	43.0	63.8
PRCM30-15D □	10	28.0	43.0	63.8
PRCM30-15A □	10	28.0	43.0	63.8
PRCML30-15D □	10	50.0	65.0	85.8
PRCML30-15A □	10	50.0	65.0	85.8