
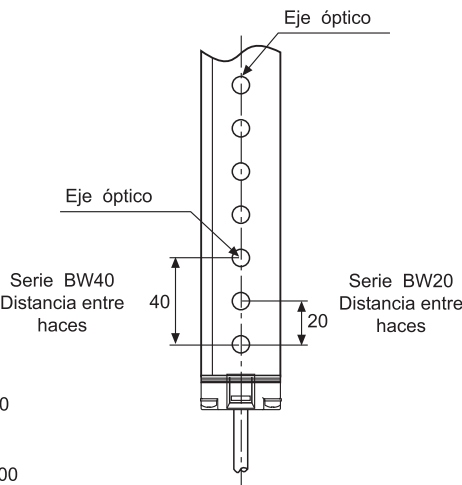


Dimensiones

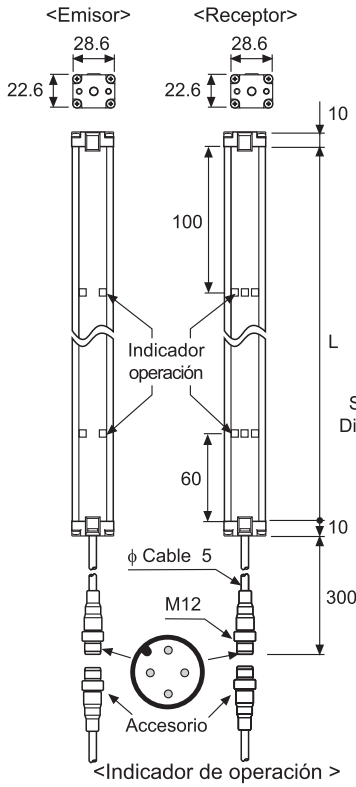


Modelo	L(mm)	Modelo	L(mm)
BW20-08(P)	160mm	BW20-32(P)	640mm
BW40-04(P)		BW40-16(P)	
BW20-12(P)	240mm	BW20-36(P)	720mm
BW40-06(P)		BW40-18(P)	
BW20-16(P)	320mm	BW20-40(P)	800mm
BW40-08(P)		BW40-20(P)	
BW20-20(P)	400mm	BW20-44(P)	880mm
BW40-10(P)		BW40-22(P)	
BW20-24(P)	480mm	BW20-48(P)	960mm
BW40-12(P)		BW40-24(P)	
BW20-28(P)	560mm		
BW40-14(P)			

Color del LED	Emisor	Receptor
Verde	Alimentación	ON
Amarillo	Prueba/Testeo(M/S)	Inestable
Rojo	—	OFF


<Conexión Eléctrica >

Pin N°	Color del cable	Emisor	Receptor
1	Cafe	12-24VCC	12-24VCC
2	Blanco	SYNC	SYNC
3	Azul	0V	0V
4	Negro	Prueba/Testeo(M/S)	OUT

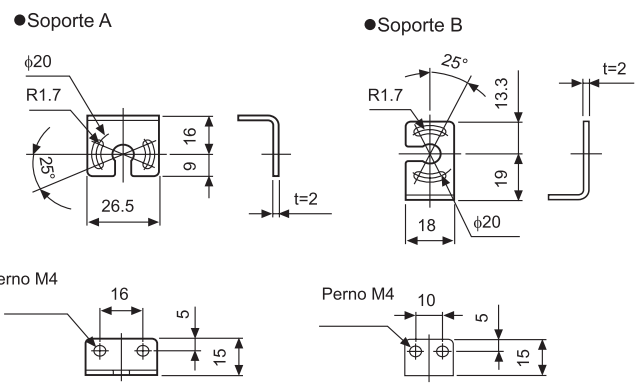

Unidad:mm

Cable de Conexión (Opcional)

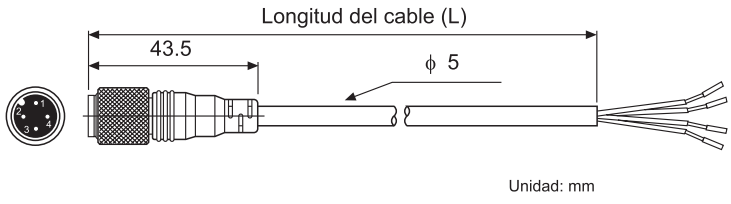

Modelo	Largura del Cable (L)	Color del conector
CID4-3-T	3m	Emisor(T) : Negro Receptor(R) : Gris
CID4-3-R		
CID4-5-T	5m	
CID4-5-R		
CID4-7-T	7m	
CID4-7-R		
CID4-10-T	10m	
CID4-10-R		

❖El cable de conexión se vende por separado

Características

